

MAYWOOD  STUDIO

JEWELRY BOX QUILT




Jewelry Box Quilt

Featuring the Dark & Stormy collection from Maywood Studio

54" x 60"

maywoodstudio.com

DARK & STORMY



Fabric 1
10442-N



Fabric 2
10440-N




Fabric 3
10440-B




Fabric 4
10440-E




Fabric 5
10441-N



Fabric 6
10446-N



Fabric 7
10444-E



Fabric 8
10445-A

Fabric Requirements

Fabric 1	10442-N	1-7/8 yards
Fabric 2	10440-N	1/2 yard
Fabric 3	10440-B	3/8 yard
Fabric 4	10440-E	1/2 yard
Fabric 5	10441-N	FQ
Fabric 6	10446-N	FQ
Fabric 7	10444-E	FQ
Fabric 8	10445-A	FQ
Binding	*we used Fabric 6	1/2 yard
Backing	3-1/2 yards	

WOF - Width of Fabric
LOF - Length of Fabric
RST - Right Sides Together
HST - Half Square Triangle

Cutting

Finished size: 54" x 60"

Fabric 1

Cut (4) 5-1/2" x WOF strips into:

A (24) 5-1/2" x 5-1/2" squares

Cut (17) 2-1/2" x WOF strips.

Reserve (8) for strip sets.

Cut (3) into:

(2) 2-1/2" x 10-1/2" B rectangles

(2) 2-1/2" x 20-1/2" C rectangles

Cut (4) 2-1/2" D squares

Cut (4) 2-1/2" x 4-1/2" E rectangles

Cut (4) 2-1/2" x 6-1/2" F rectangles

Borders:

Sew (6) strips together, end to end. Cut into:

(2) 2-1/2" x 54-1/2" top and

bottom borders.

(2) 2-1/2" x 56-1/2" side borders

Fabric 2

Cut (1) 10-1/2" x 16-1/2" G rectangle

Cut (2) 2-1/2" x WOF strips

Fabric 3

Cut (5) 2-1/2" x WOF strips.

Reserve (2) strips for strip sets.

Cut (2) strips into:

(2) 2-1/2" x 14-1/2" H rectangles

(2) 2-1/2" x 24-1/2" I rectangles

Cut (1) strip into:

(4) 2-1/2" J squares

(4) 2-1/2" x 4-1/2" K rectangles

Fabric 4

Cut (6) 2-1/2" x WOF strips.

Reserve 4 for strip sets.

Cut (2) strips into:

(4) 2-1/2" x 6-1/2" N rectangles

(4) 2-1/2" x 8-1/2" M rectangles

Fabrics 5, 6, 7, 8

Cut (6) 5-1/2" x 5-1/2" N squares

Binding

Cut (6) 2-1/2" x WOF strips.


Jewelry Box Quilt Instructions

Please read all instructions before you begin. Seam allowance is 1/4".

Fabric is abbreviated as 'F' - for example, F1 refers to Fabric 1.

Center Block


1. Sew an F1-B rectangle to the top and bottom of the F2-G rectangle. Press toward F2.
2. Sew an F1-C rectangle to each side of the step 1 unit. Press toward F2.
3. Sew an F3-H rectangle to the top and bottom of the step 2 unit. Press toward F3.
4. Sew an F3-I rectangle to each side of the step 3 unit. Press toward F3.

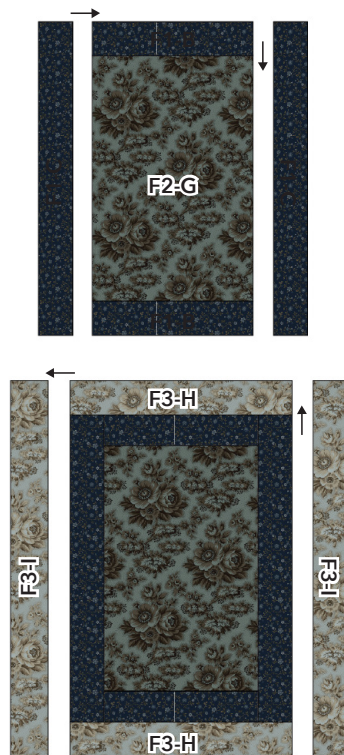

Make 1
18-1/2" x 24-1/2"


Strip Set

1. Sew the WOF strips together as illustrated below. Press away from F1. Make 2 strip sets.
2. Cut the strip sets into two sections:
16-1/2" x 24-1/2"
16-1/2" x 18-1/2"

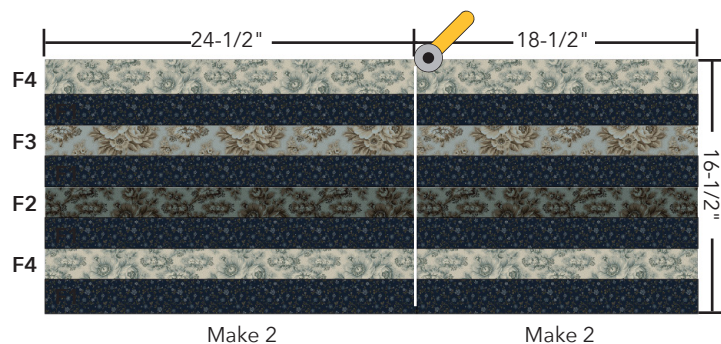

Half Square Triangle Units

1. Mark a diagonal line from corner to corner on the wrong side of the F1-A squares.

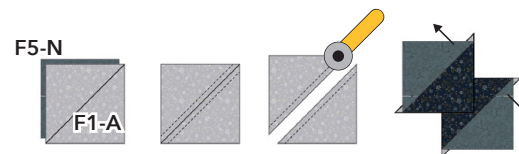

2. Place an F1 square, RST (right sides together) over an F5-N square. Sew 1/4" away from either side of the marked line.

3. Cut apart on the marked line. Press away from F1.

4. Square up each unit to 4-1/2" x 4-1/2". Make 6 for a total of 12 HST units.

5. Repeat to make 12 of the HST units of each remaining pair: F1/F6, F1/F7, and F1/F8.


6. Lay the HST units out as illustrated to the right. Sew together into a 4-patch unit. Make 12.




Quarter Log Cabin Units

Follow the illustrations to the right.


1. Sew an F1-D square and F3-J square together. Press toward F3. Sew the F3-K rectangle to the bottom of the D/J unit. Press toward F3.



2. Sew an F1-E rectangle to the left side of the step one unit. Press toward F1. Sew an F1-F rectangle to the bottom of that unit. Press toward F1.

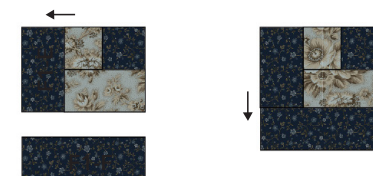

3. Sew an F4-L rectangle to the left side of the step two unit. Press toward F4. Sew an F4-M rectangle to the bottom of that unit. Press toward F4.


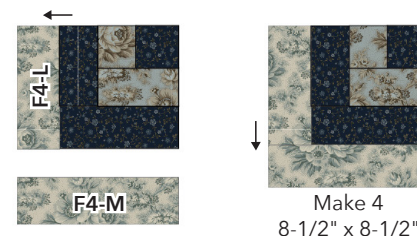


Corner Sections

1. Lay the HST Four-Patch Units and Quarter Log Cabin Units out as illustrated to the right.

2. Sew into pairs. Press to nest.

3. Sew rows together. Press. Make 4.




Make 4
16-1/2" x 16 -1/2"

Row Assembly

1. Lay out the corner sections - strip sets - and center section into rows as illustrated to the right. Press toward strip sets.

2. Sew the rows together. Press in one direction.

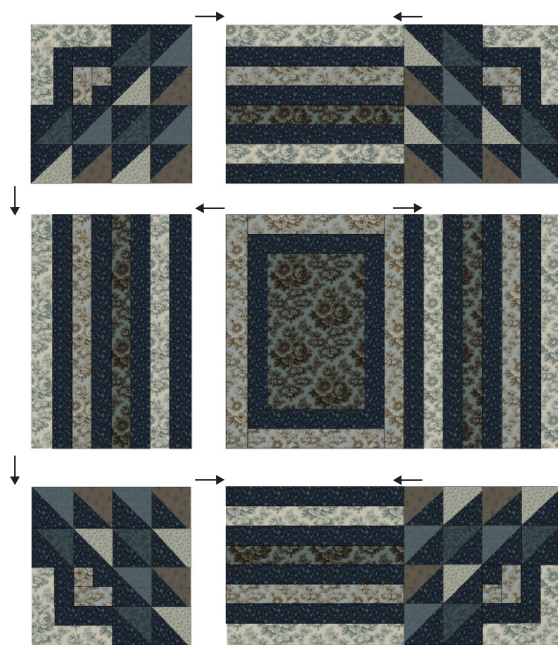


Add the Borders

Tip: Pin the borders onto the quilt top starting with one pin in the center and one at each end. Then add pins in between. Do not pin from one end to the other.

1. Sew the side borders to the quilt top. Press toward the borders.

2. Sew the top and bottom borders to the quilt top. Press toward the borders.

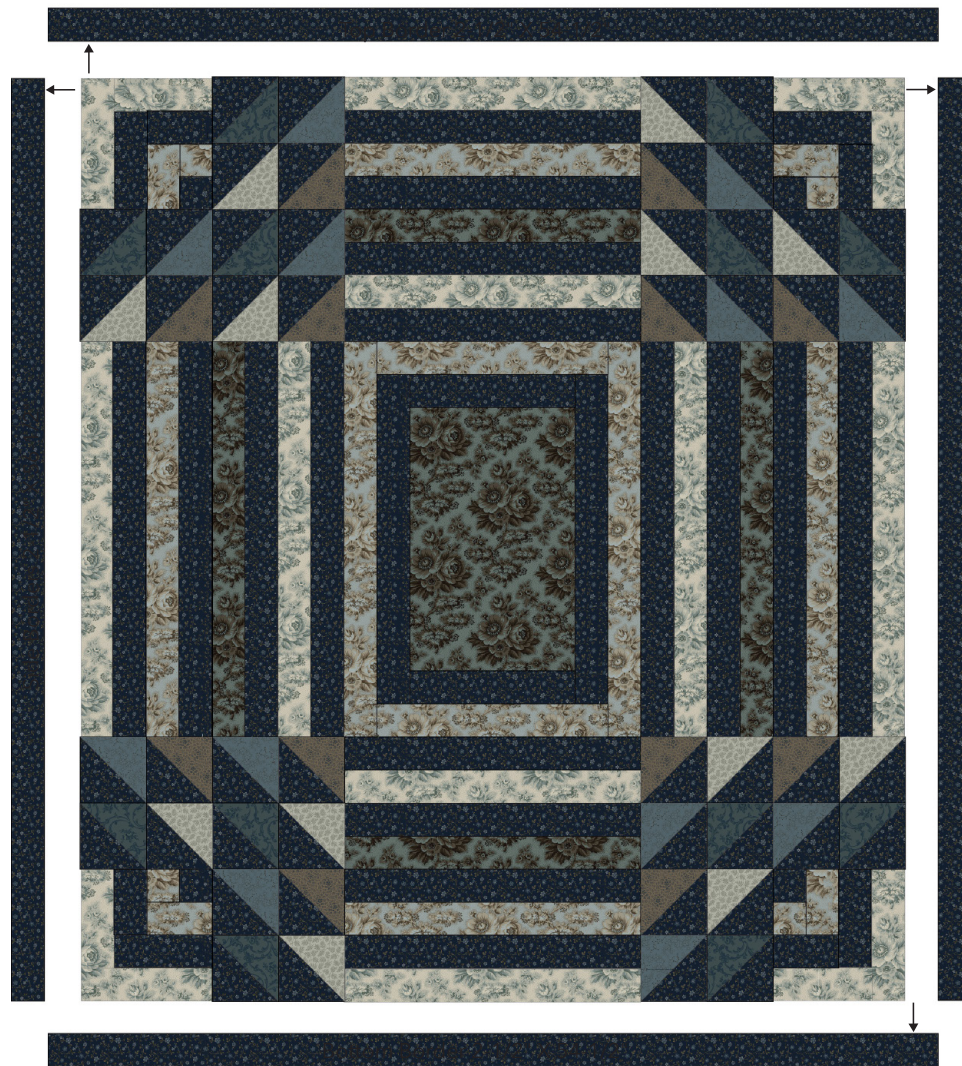

Finishing

1. Layer the backing (wrong side up), batting and quilt top (right side up). Baste layers to secure. Quilt as desired. Trim the excess backing and batting.

2. Sew the binding strips together into one continuous strip. Press in half length-wise. Sew the binding to the quilt top with a 1/4" seam allowance. Turn the binding to the back side of the quilt and stitch down by hand with matching thread.

Quilt Planning Diagram

Use this diagram to plan your quilt top.

